

WA WELLINGTON  
ARCHITECTURAL

# KONVALLIS PANEL



## KONVALLIS PANEL


Wellington Architectural's Konvallis Panel is a decorative timber lining board. The modern concave textured design and natural timber colour of the Konvallis Panel will create a feature of any wall.

### Panel Features:

- PEFC and FSC Certified timber
- Easy to install
- Custom lengths (to reduce waste)

The Konvallis Panel features a hidden tongue and groove system which provide a seamless finish with fast installation and reduced waste.

Panels can be used internally on vertical and horizontal surfaces. Ideal for using in large scale commercial projects or as a small feature wall in a residential home.

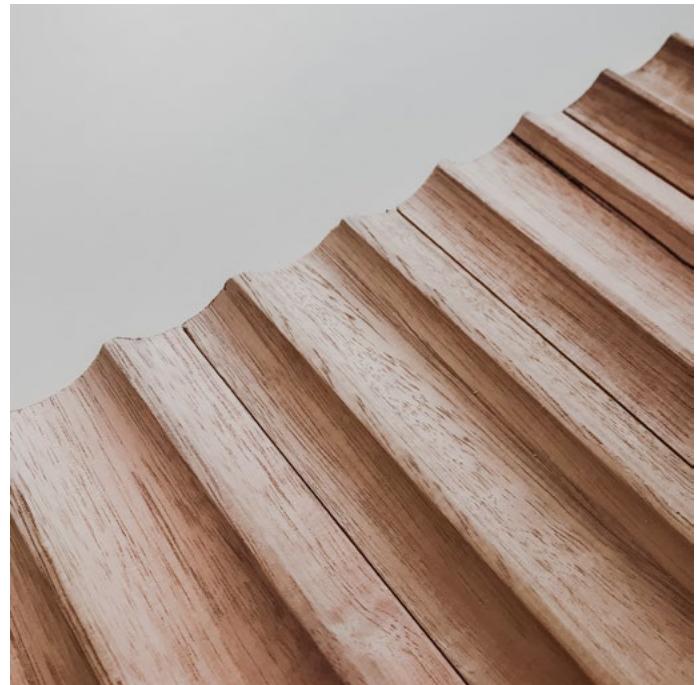


### Product Details

**Panel Size:** 91x21mm

**Available in our full range of timber species**

- Radiata Pine
- Western Red Cedar
- Hoop Pine
- Hemlock
- Victorian Ash
- Spotted Gum
- Blackbutt
- American Oak
- Tasmanian Oak

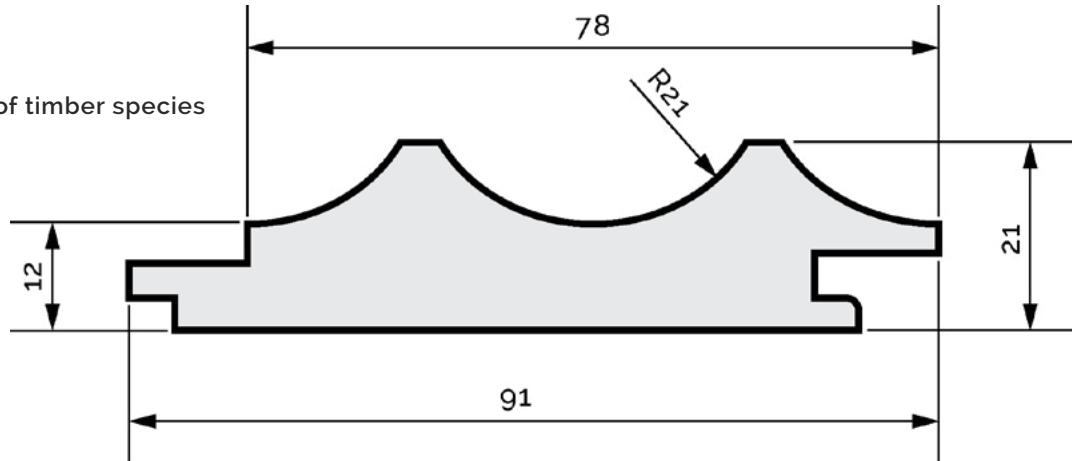

Please contact us if you have any questions or would like a quote for your next project.

P: 02 6280 8496

E: [info@wellingtonarchitectural.com](mailto:info@wellingtonarchitectural.com)




[www.wellingtonarchitectural.com](http://www.wellingtonarchitectural.com)

# TIMBER SPECIES GUIDE

Wellington Architectural timber species guide is aimed to assist architects, builders and contractors to determine the right timber to suit your project.

		Seasoned Density	Shrinkage	Hardwood or Softwood	Durability Above Ground	Application
\$↑	<b>Radiata Pine</b> <i>Pinus radiata</i> White to Pale Yellow	550kg/m <sup>3</sup>	Medium	Softwood	Low (0-7 years)	Interior Exterior (if treated)
	<b>Western Red Cedar</b> <i>Thuja plicata</i> Pale Brown to Pink Brown Late wood darker	350kg/m <sup>3</sup>	Very Low	Softwood	Reasonably High (15-40 years)	Interior Exterior
	<b>Hoop Pine</b> <i>Araucaria cunninghamii</i> Pale cream to light yellow	550kg/m <sup>3</sup>	Low	Softwood	Low (0-7 years)	Interior Exterior (if treated)
	<b>Hemlock</b> <i>Tsuga heterophylla</i> Pale cream	500kg/m <sup>3</sup>	Medium	Softwood	Low (0-7 years)	Interior
	<b>Victorian Ash</b> <i>Eucalyptus regnans</i> Pale pink to yellowish brown	660kg/m <sup>3</sup>	Very High	Hardwood	Moderate (7-15 years)	Interior
	<b>Spotted Gum</b> <i>Corymbia maculata</i> Light brown to deep red-brown hues	1100kg/m <sup>3</sup>	Medium	Hardwood	High (+40 years)	Interior Exterior
	<b>Blackbutt</b> <i>Eucalyptus pilularis</i> Golden yellow to pale brown occasional pink hues	900kg/m <sup>3</sup>	High	Hardwood	High (+40 years)	Interior Exterior
\$\$\$↓	<b>American Oak</b> <i>Quercus alba</i> Light to dark brown	750kg/m <sup>3</sup>	Very High	Hardwood	Moderate (7-15 years)	Interior

\*All timber species above have a Fire Properties Group Number of 3 (slightly combustible)

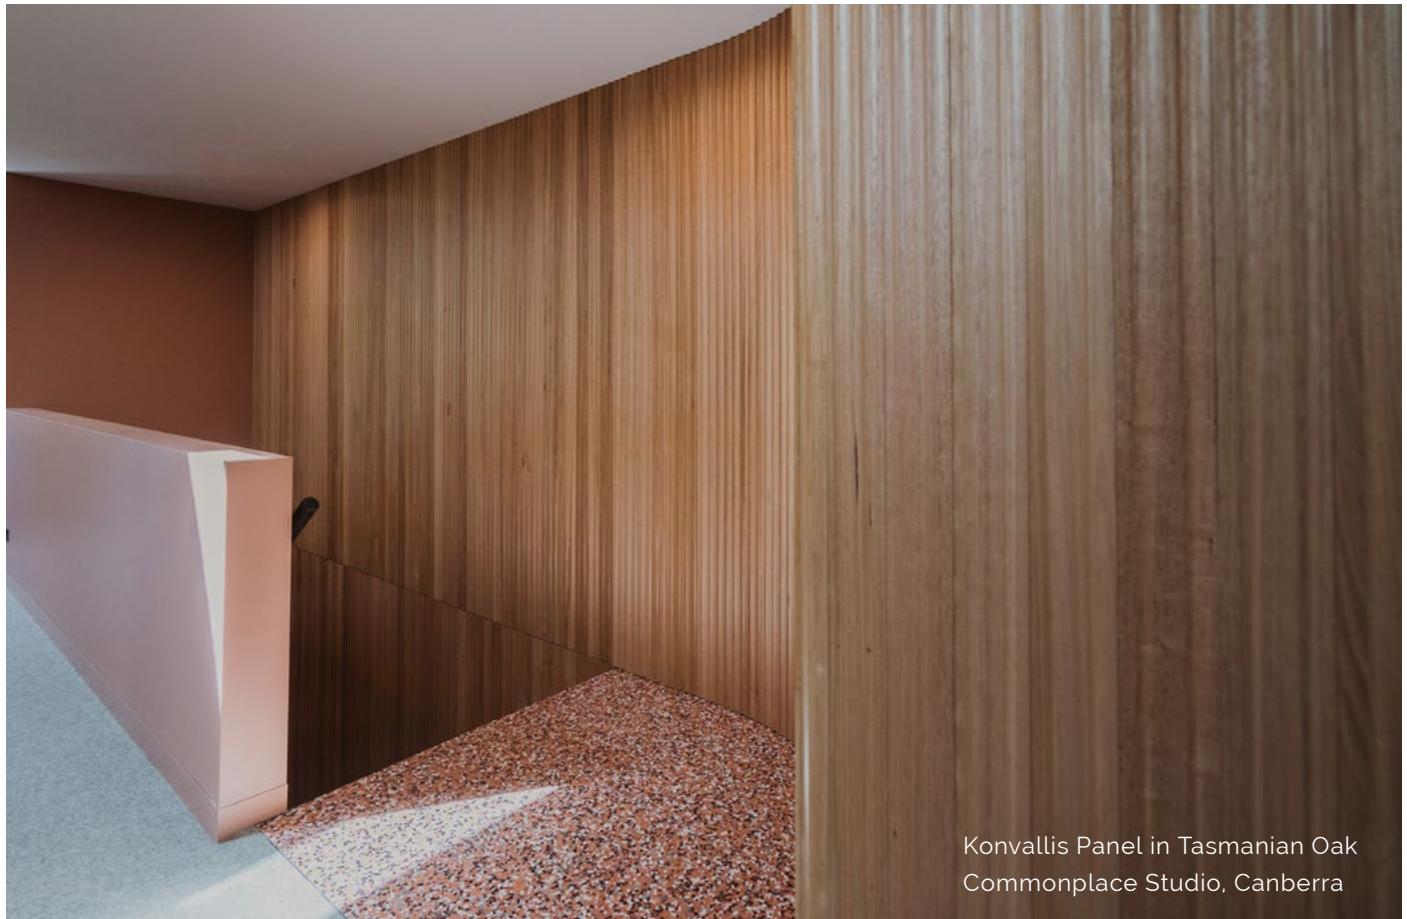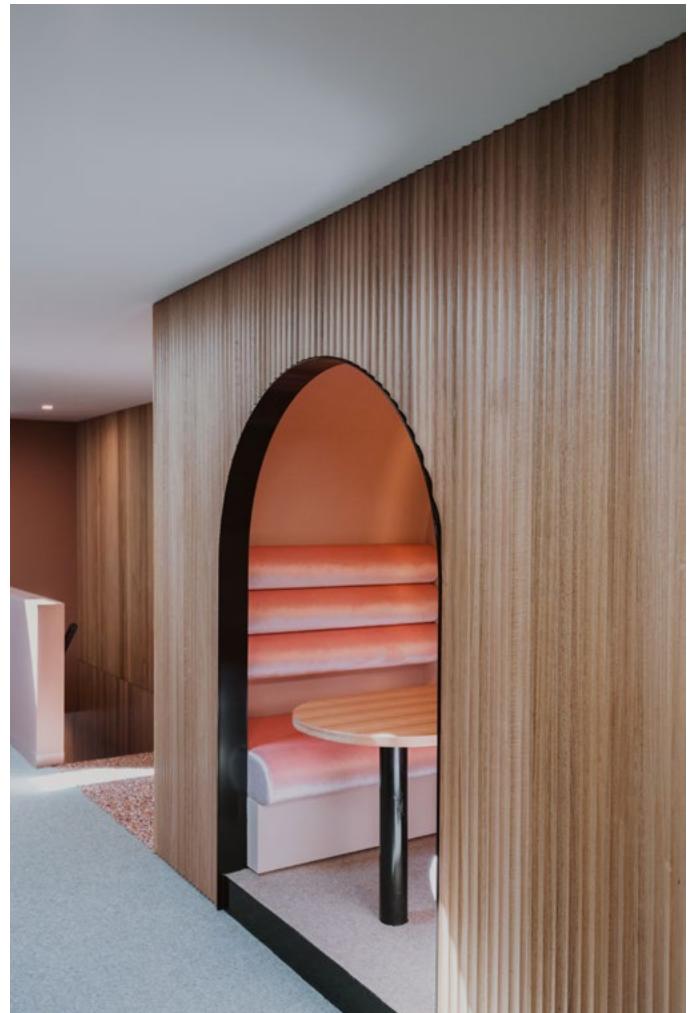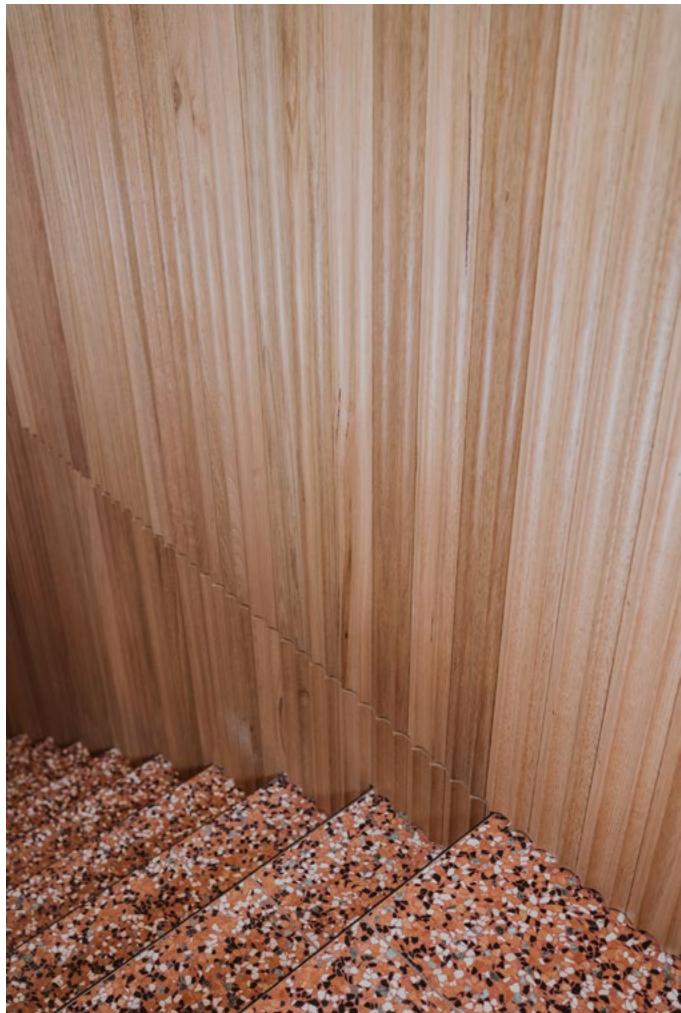

Konvallis Panel in Tasmanian Oak  
Commonplace Studio, Canberra